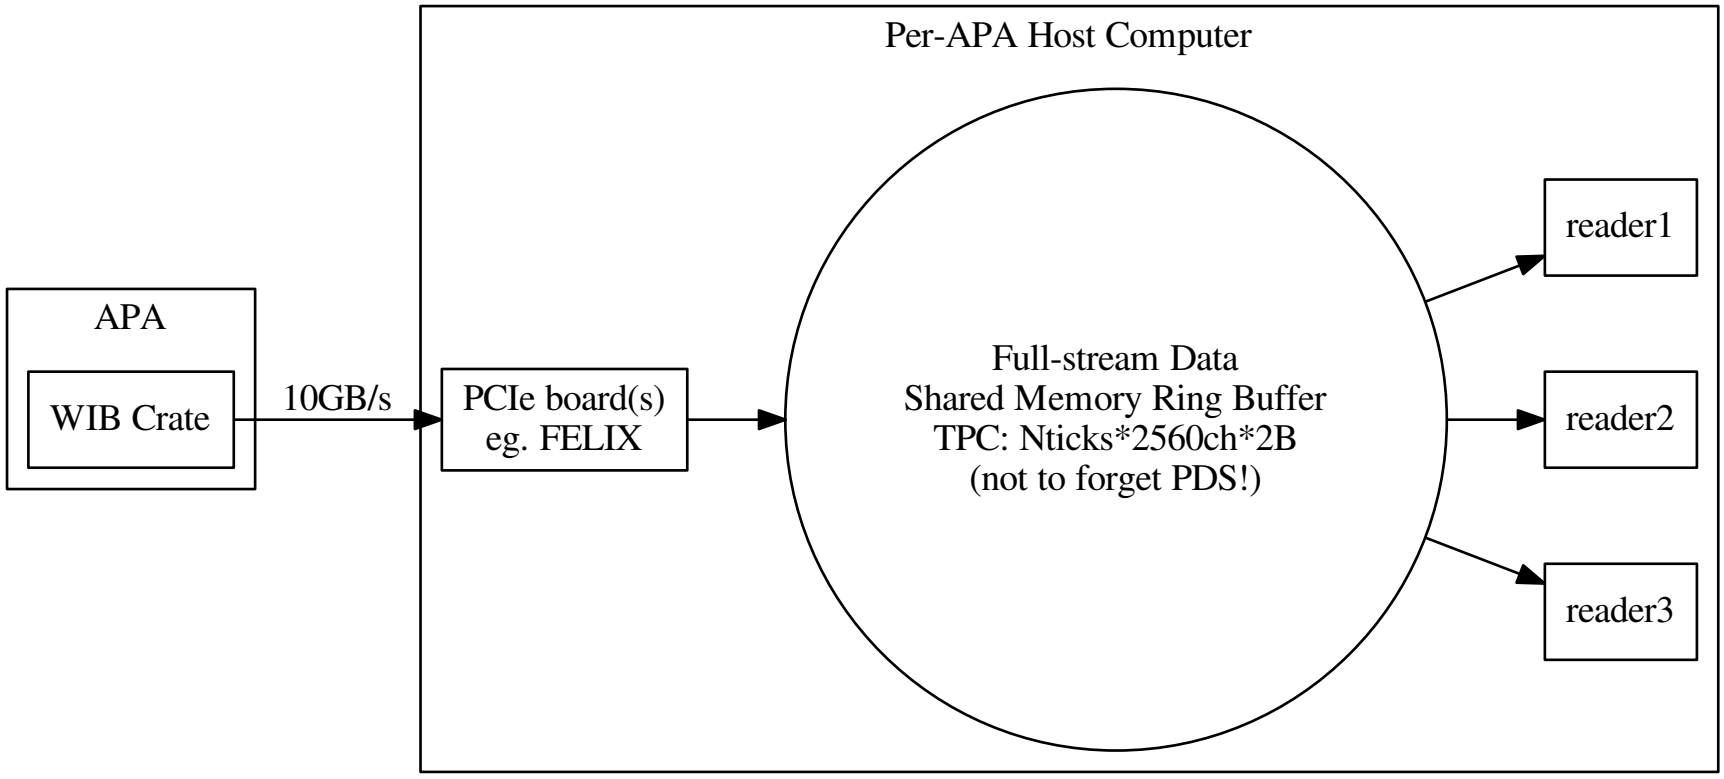

Per-APA Host Computer
APA
WIB Crate
10GB/s
PCIe board(s)
eg. FELIX
Full-stream Data
Shared Memory Ring Buffer
TPC: Nticks*2560ch*2B
(not to forget PDS!)
reader1
reader2
reader3