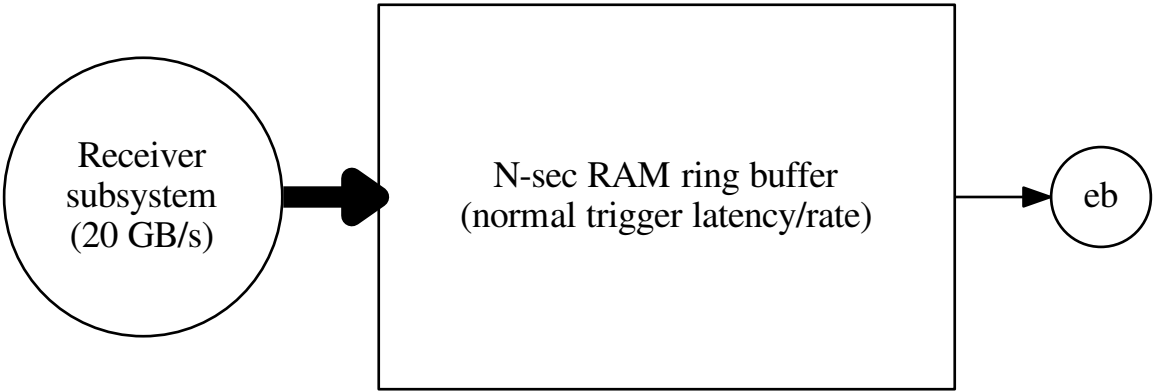

Receiver
subsystem
(20 GB/s)
N-sec RAM ring buffer
(normal trigger latency/rate)
eb