Sketches of

12 Q 16


12 Q 12

N8Q24

N8Q12


N8Q12

MAXIMUM GRADIENT	3.3 KG/IN
VOLTAGE	42 V
CURRENT	3000 AMPS
MEAN EFFECTIVE LENGTH (APPROX)	14.8 IN
GROSS WEIGHT	2 TONS
WATER CONSUMPTION	34 GPM
ΔP	150 PSI
ΔT	25° F
RES OHMS	0.014 OHMS

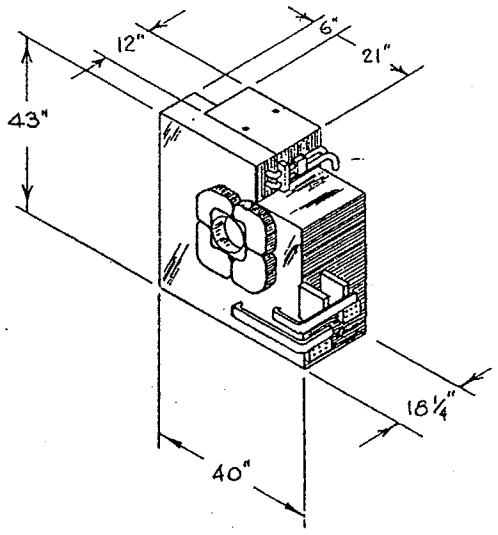


N8Q24

MAXIMUM GRADIENT	3.3 KG/IN
VOLTAGE	63 V
CURRENT	3000 AMPS
MEAN EFFECTIVE LENGTH (APPROX)	28"
GROSS WEIGHT	3.4 TONS
WATER CONSUMPTION	30 GPM
ΔP	160 PSI
ΔT	43° F
RES OHMS	0.021 OHMS

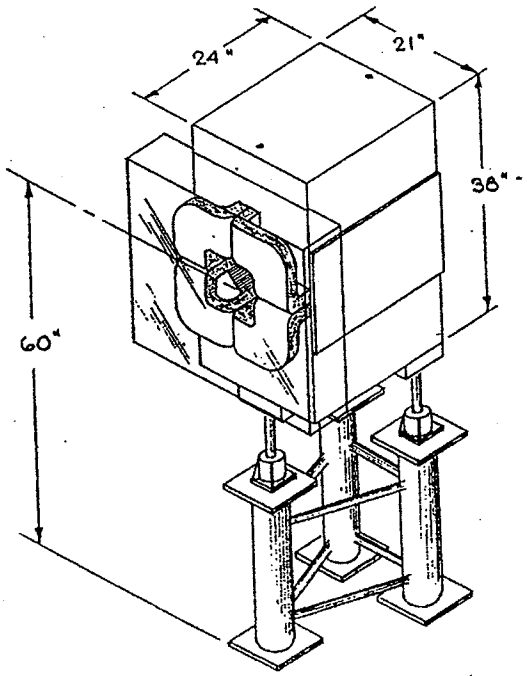

12Q12

MAXIMUM GRADIENT	2.18 KG/IN
VOLTAGE	88 VDC
CURRENT	3000 ADC
MEAN EFFECTIVE LENGTH (APPROX)	18 IN
GROSS WEIGHT	2.5 TONS
WATER CONSUMPTION	25 GPM
ΔP	150 PSI
ΔT	72° F
RES. OHMS	0.029 OHMS

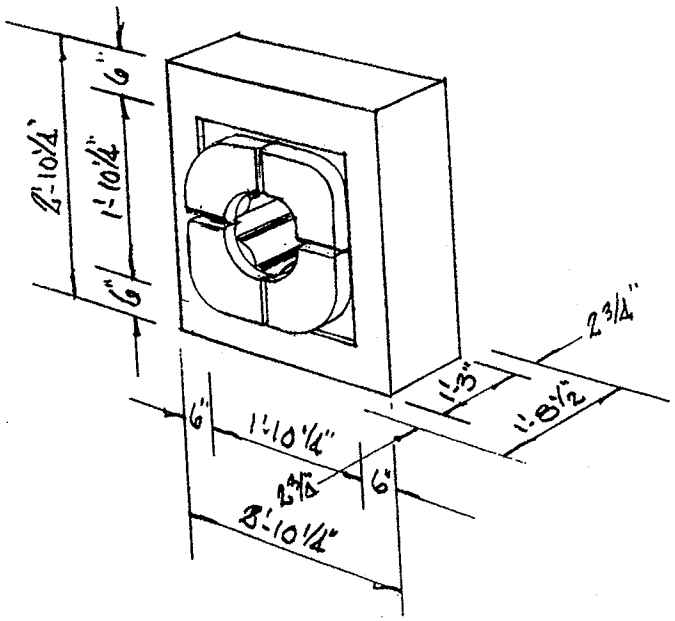

MAXIMUM GRADIENT	2.14 KG/IN
VOLTAGE	90 VDC
CURRENT	2800 ADC
MEAN EFFECTIVE LENGTH (APPROX)	22 IN
GROSS WEIGHT	3 TON
WATER CONSUMPTION	40 GPM
ΔP	150 PSI
ΔT	43° F
RES. OHMS	0.032 OHMS

